









**PA-Rigging towers
NEXT TRUSS**

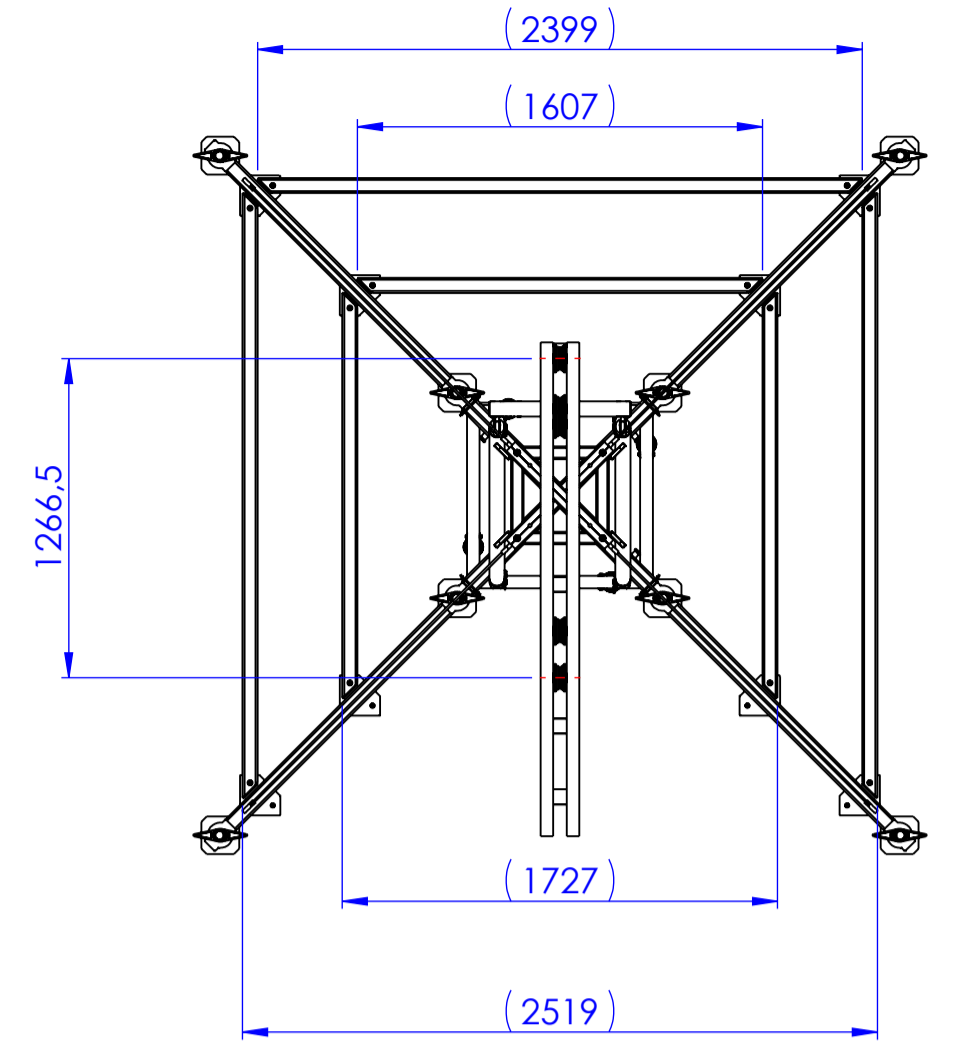

Topsection compatible
with NH34 and NH44

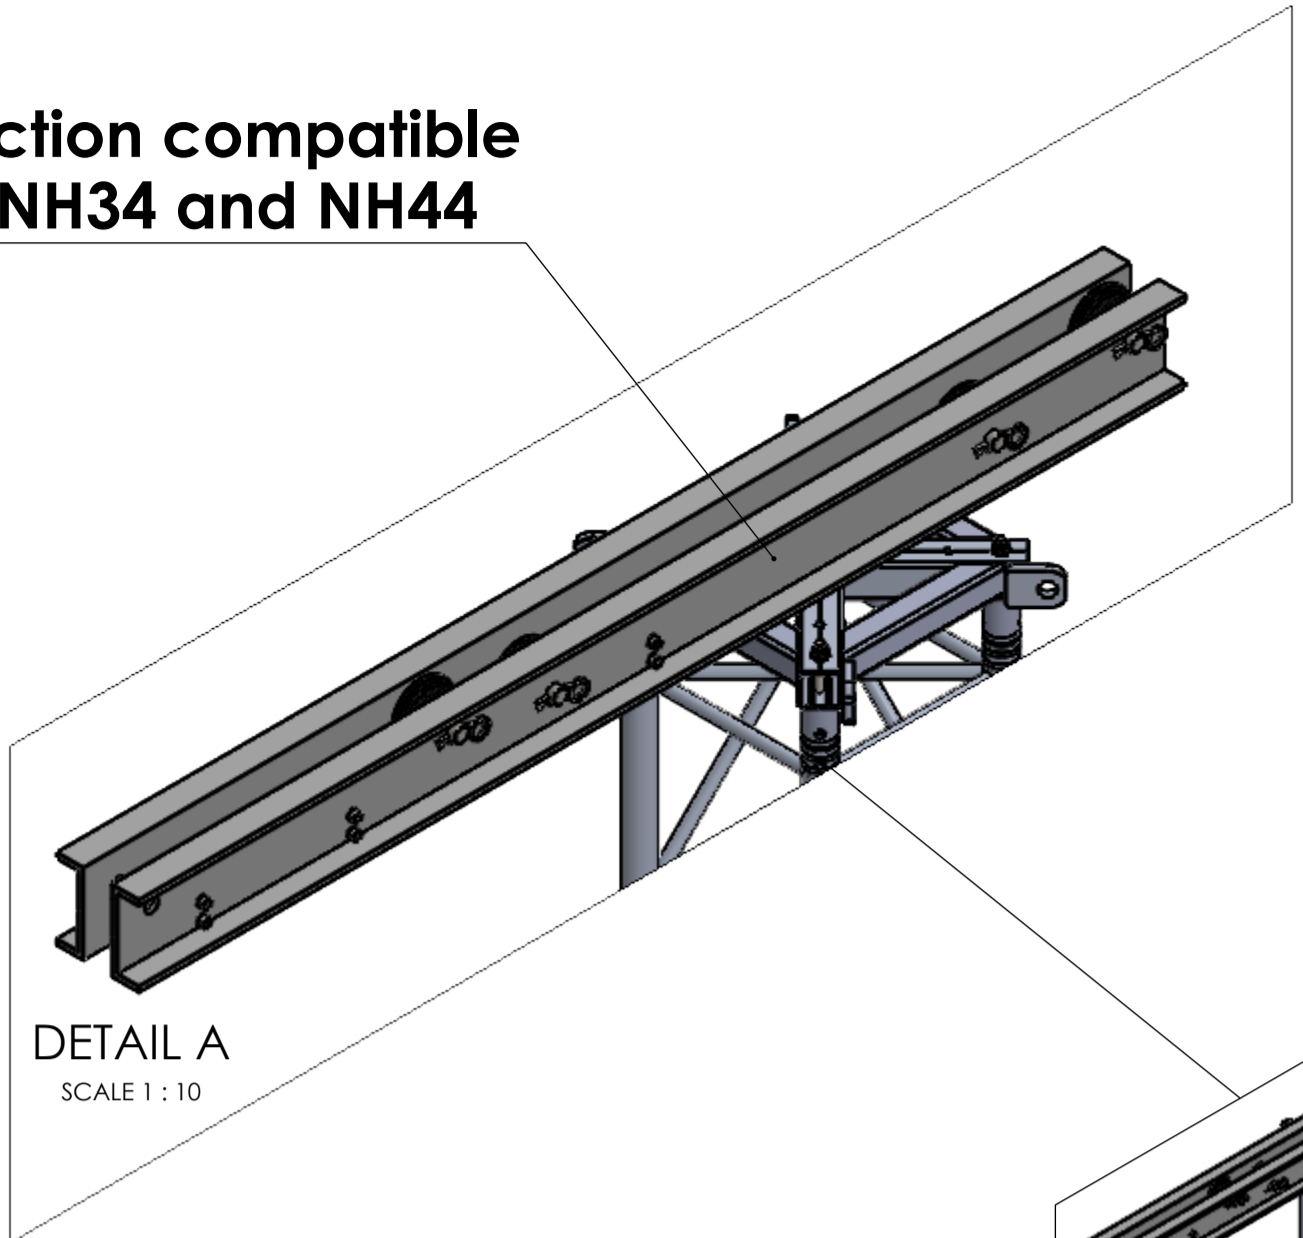

NOTE
The maximum load is 1000 kg
The ropes are attached at a height of 8,0 meters
The construction is ballasted 3-ways with 1000 kg on each side
The maximum front area of the speakers is 6 m², and 3 m² for the side

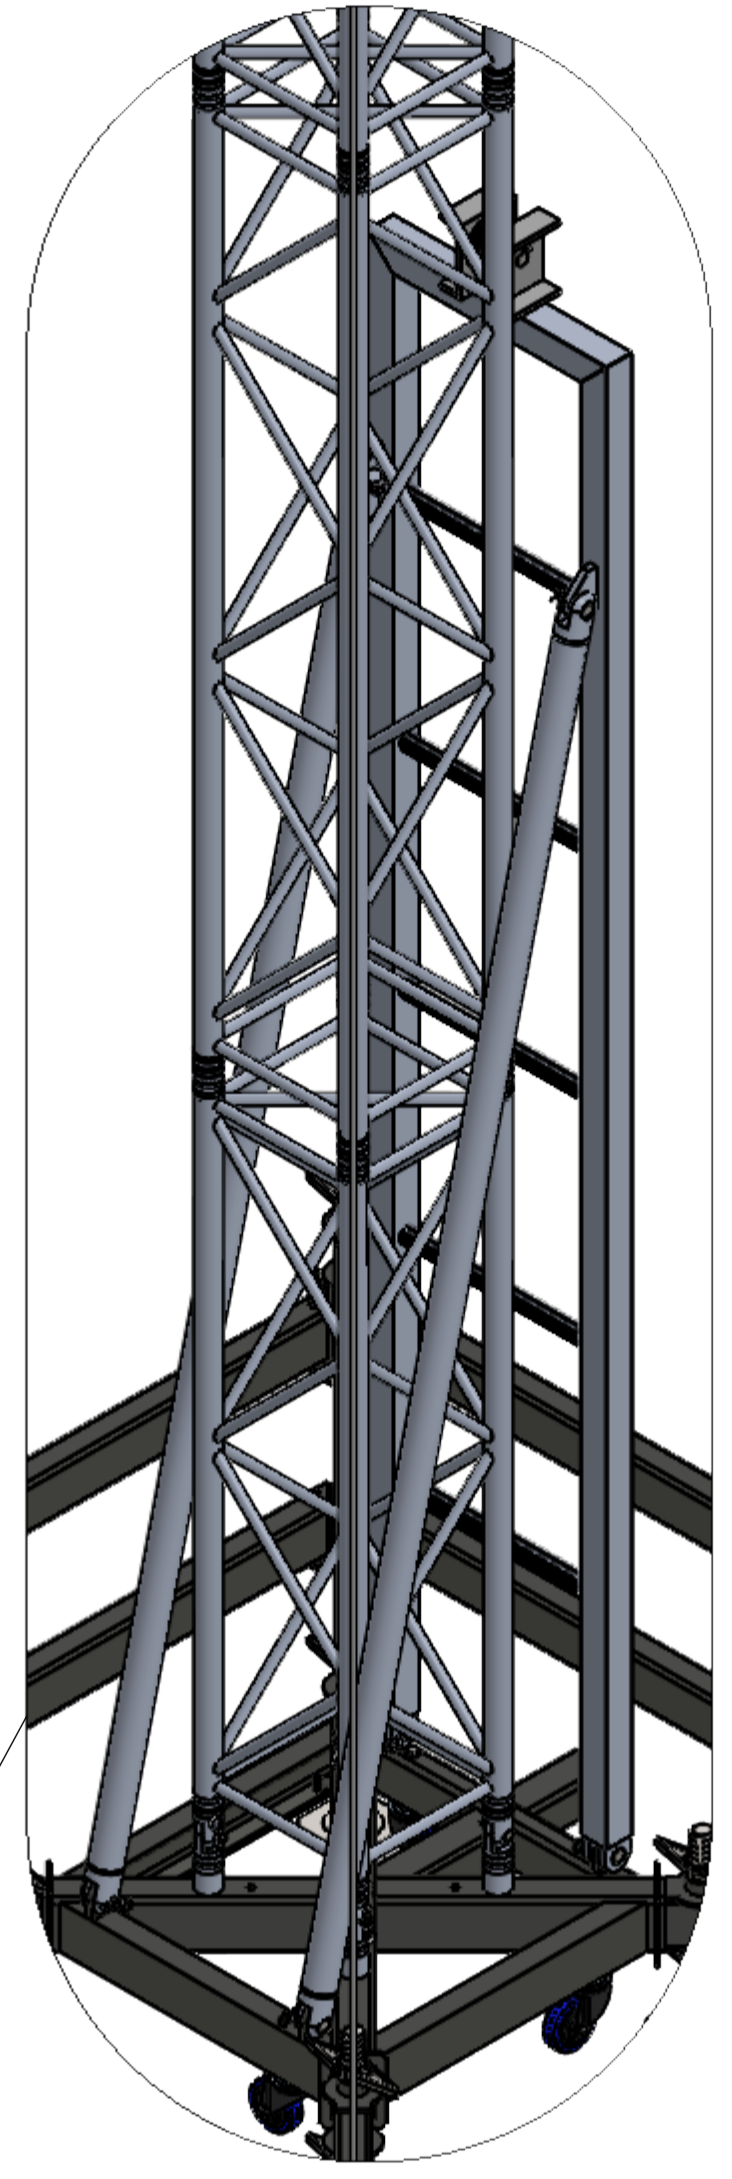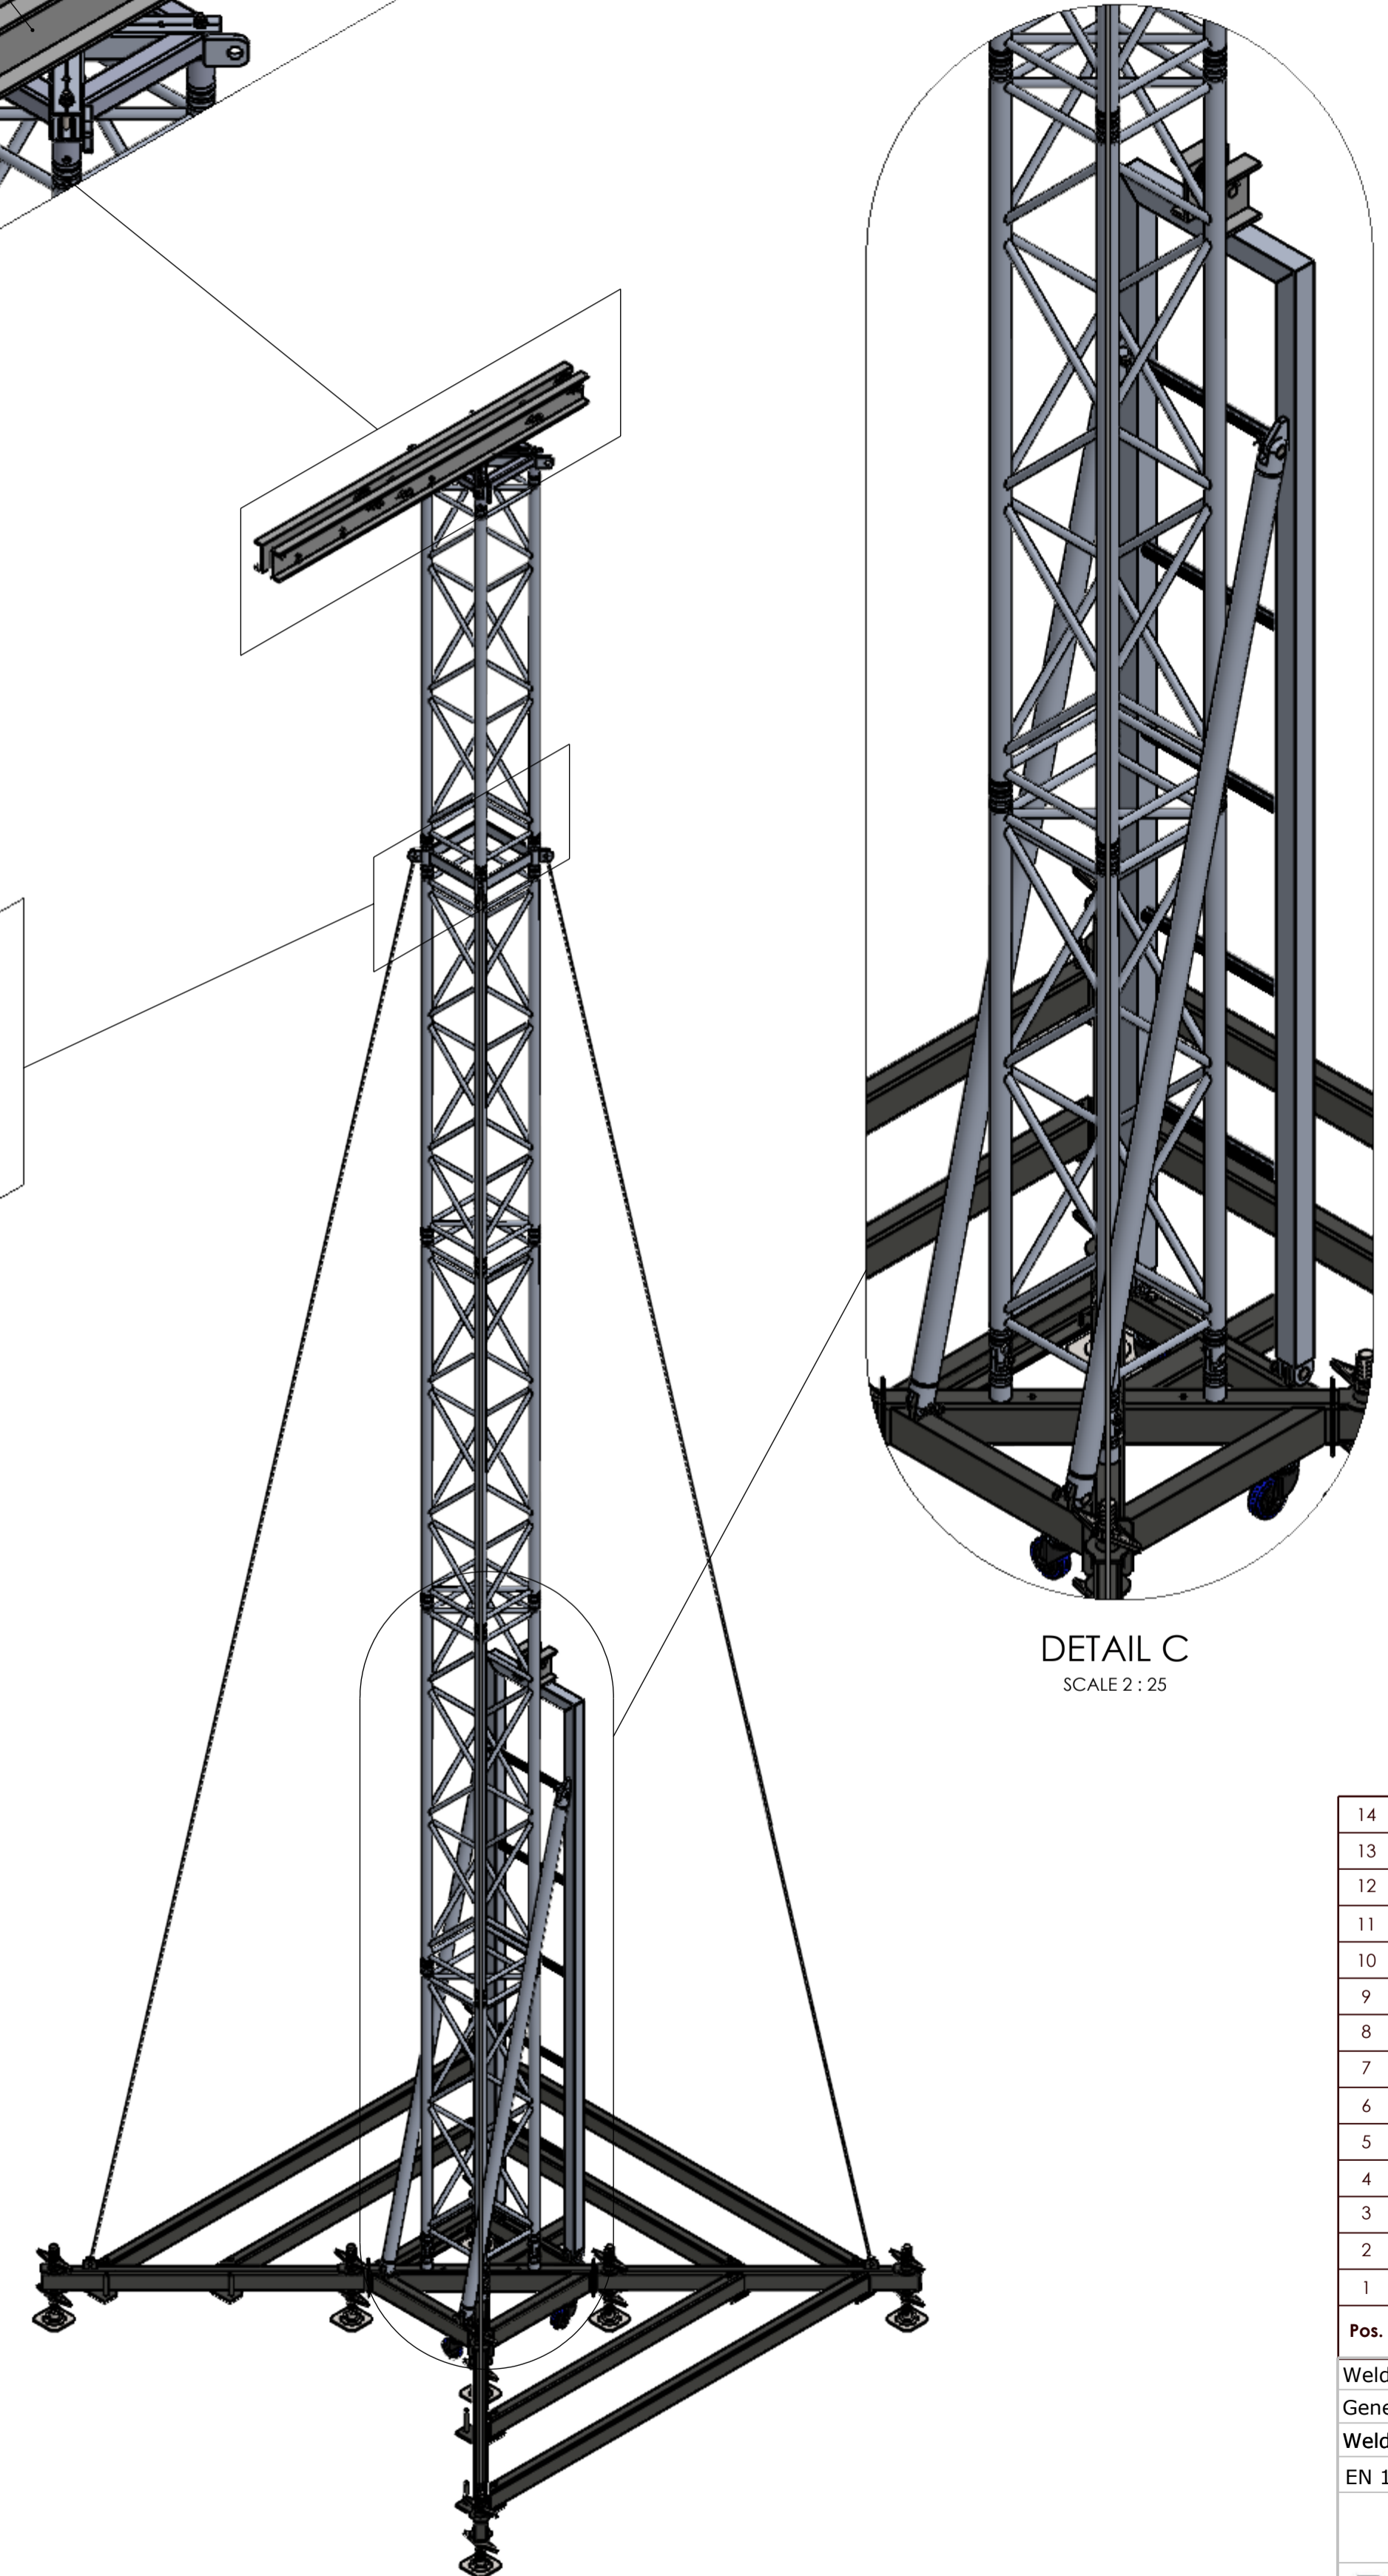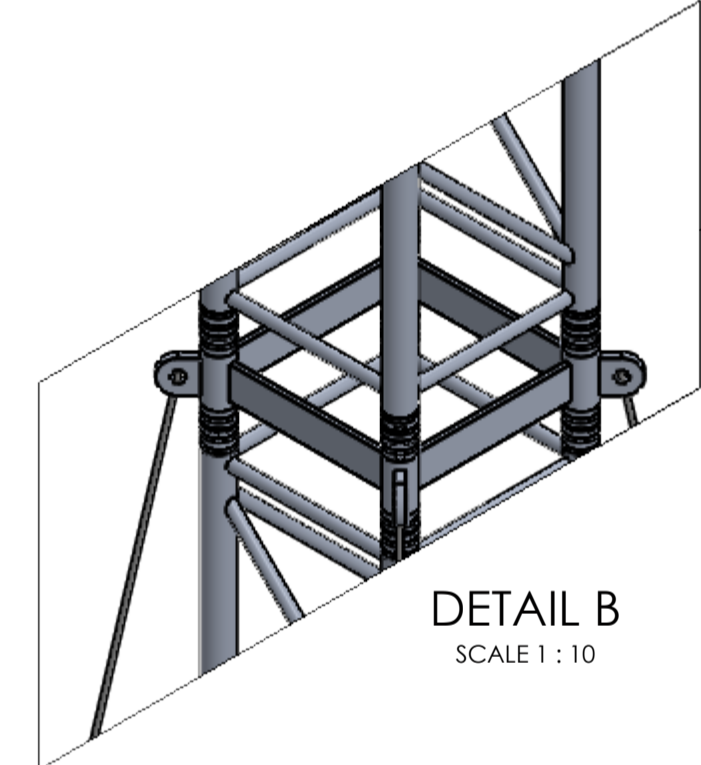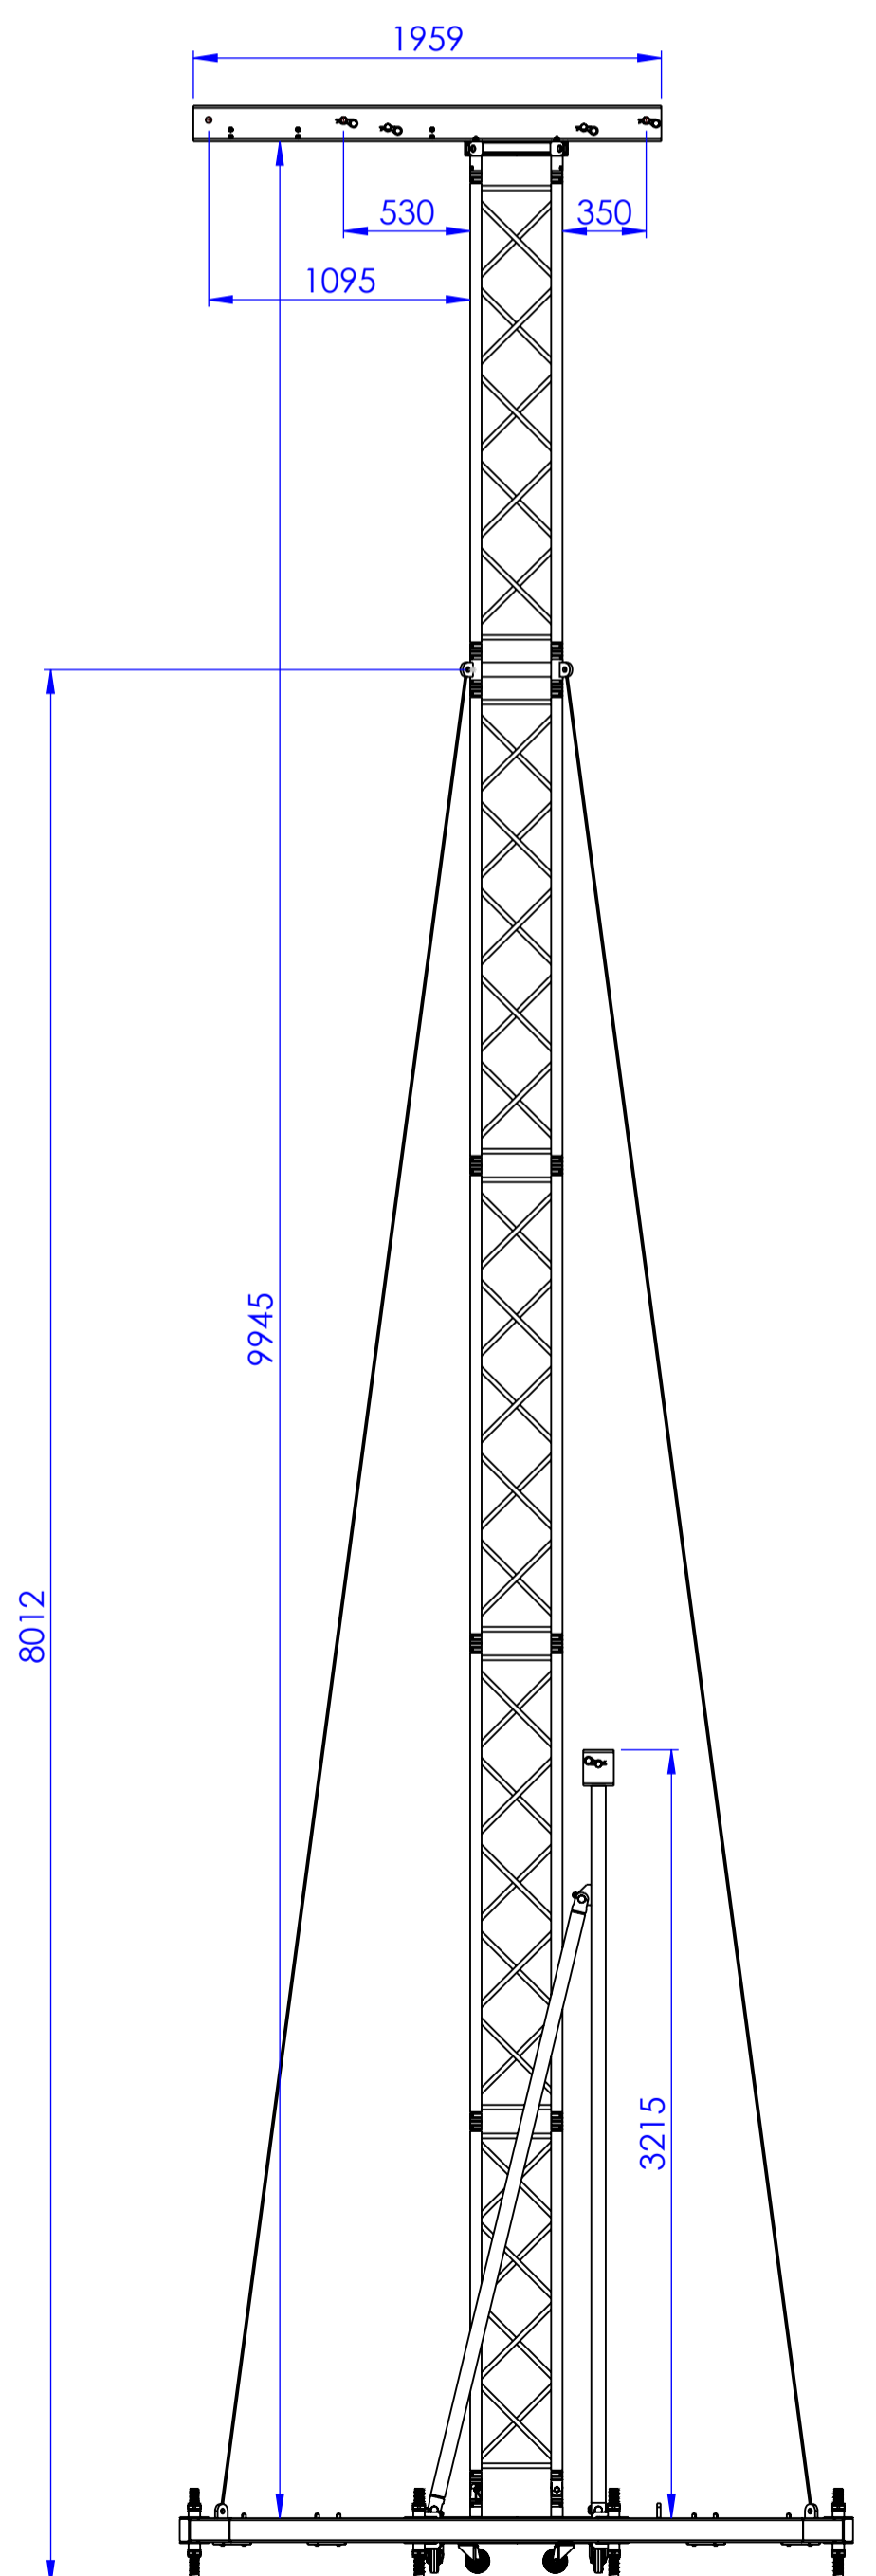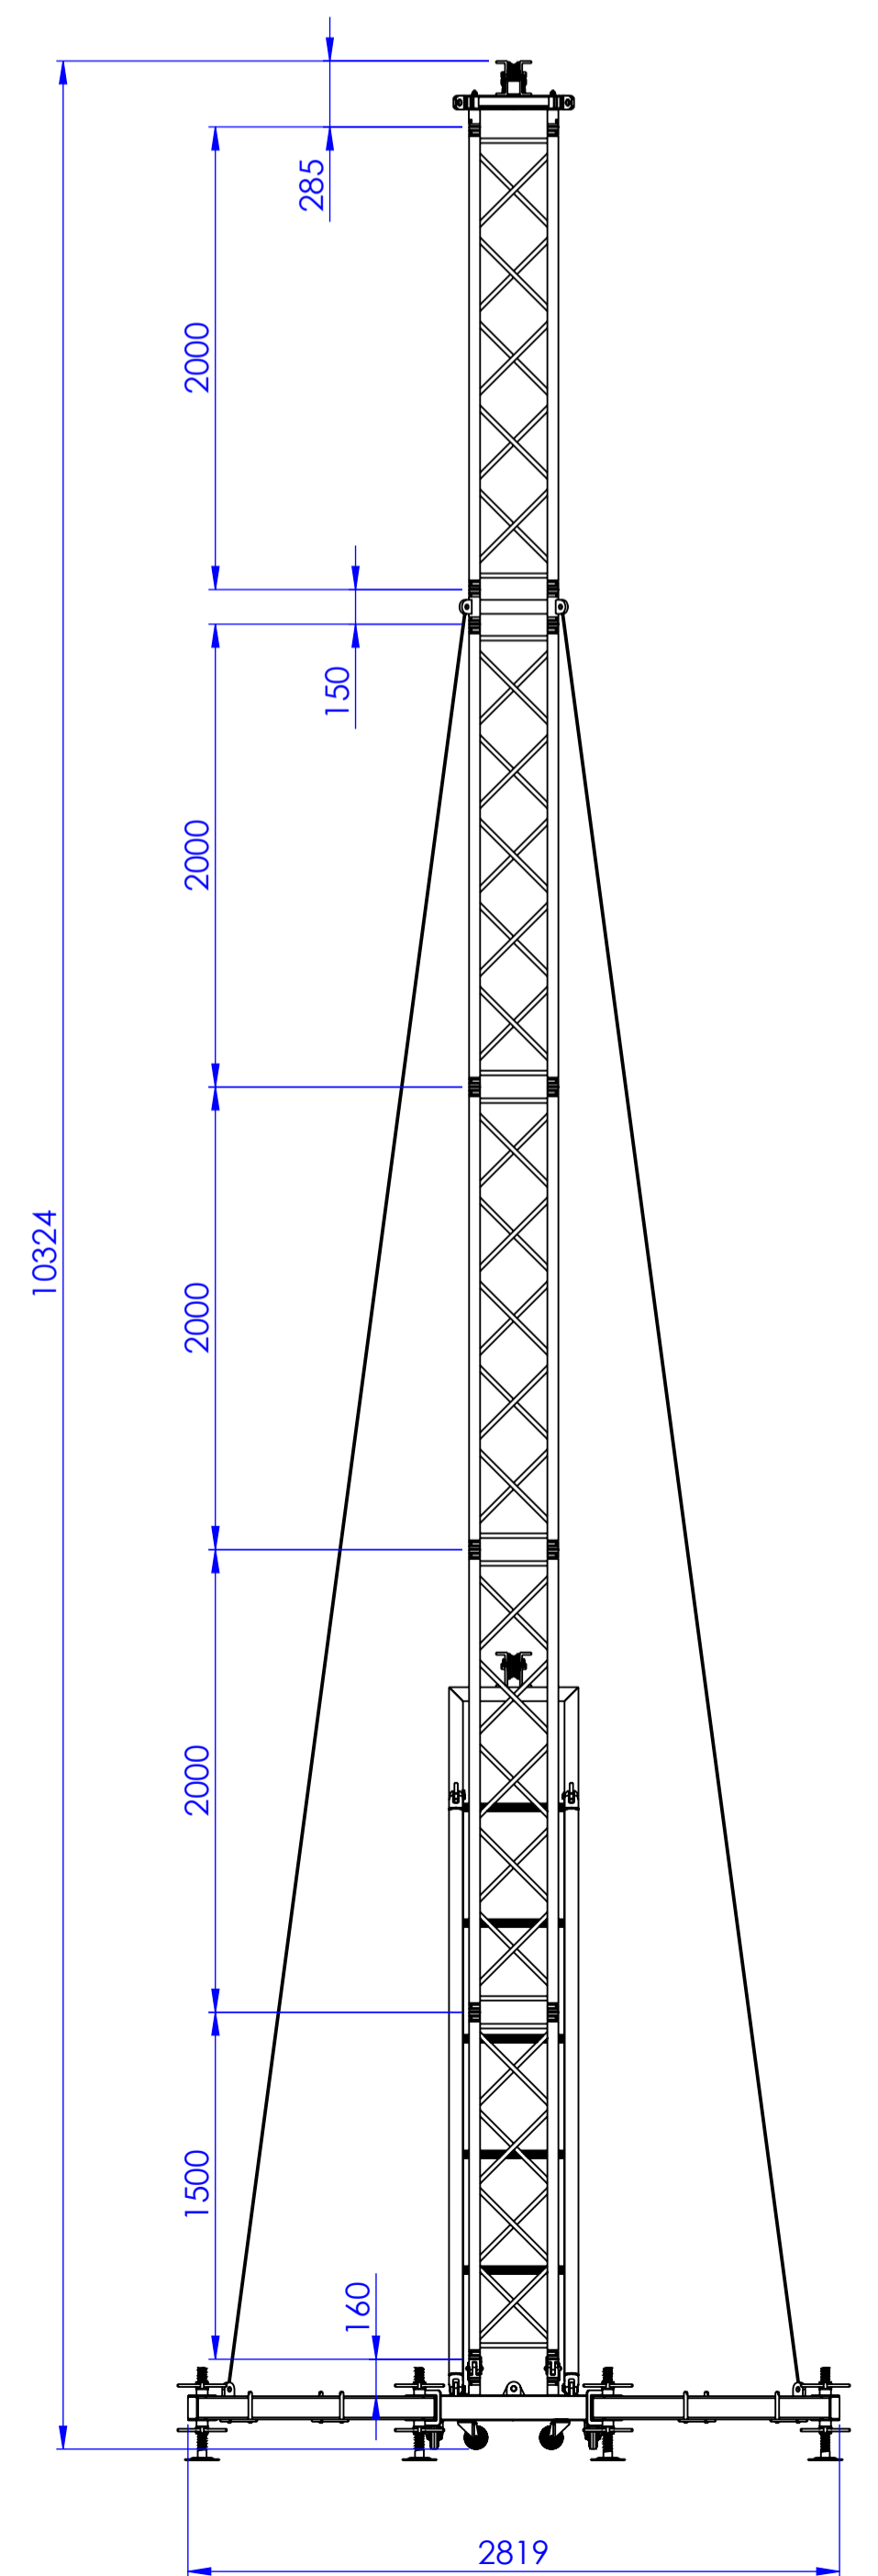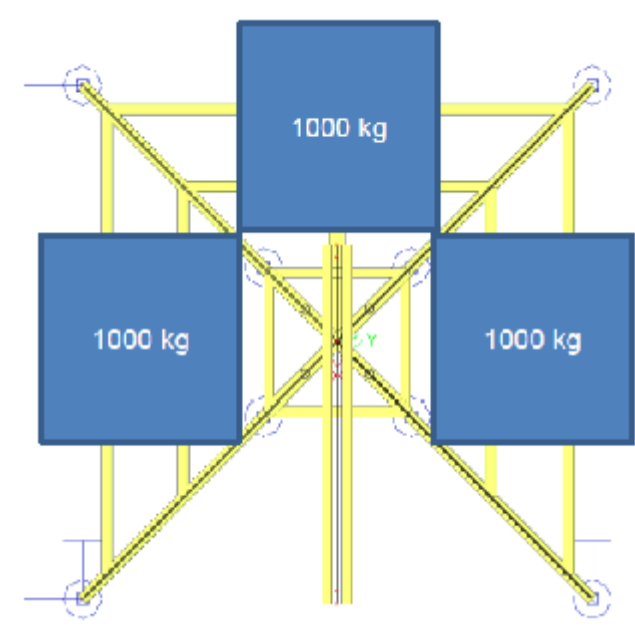

Pos.	Quantity	Dimensions	Material	Partname	Notes
14	1	Erector frame (Lever for tower)	EN AW 6082-T6	NEXT-PA-TE5-01	
13	2	Stabilizer for erector frame	EN AW 6082-T6	NEXT-TE5-PB-001	
12	1	Spacer truss L=150	EN AW 6082-T6	NH44-CAP	With steelcable lips
11	4	∅48x3	EN AW 6082-T6	NH44-200	
10	1	∅48x3	EN AW 6082-T6	NH44-150	
9	4	Steelcable sets	Steel	NRT-30-8-CS	Also fits NRT40-10 tower
8	1	Topsection	EN AW 6082-T6	NT-TOP-PA-01	Compatible NH34 - NH44
7	4	Hingeparts male + female	EN AW-6082 T6	Hinge set APL	Hingeset Male+Female
6	4	NC1 ∅48 L= 75mm	EN AW-6082 T6	NC1-BOB75	
5	3	1610x100x60	S235 & S355	NT-BB-I	Inside
4	3	2402x100x60	S235 & S355	NT-BB-O	Outside
3	8	375 x 100	S235 JR	06-016-006	Layherspindle
2	4	Outrigger for NT-BASE 1630x160x120	S235 & S355	NT-OUTR-PA	
1	1	Steelbase 780x780x110	S235 & S355	NT-BASE-PA	With wheels

Welding Tol. EN-ISO 13920-B Material: Not Specified Designed by:
 General Tol. EN-ISO 2768-M Weight(g): 446233,43 J. Rongen
 Weld Spec. EN 2253 Fillet Weld Type: A3 (unless otherwise posted)
 EN 1090-3 Scale: 1:30 Customer: NEXT TRUSS
 Format: mm
 Date: 14-7-2023 Project name / Description: PA-Rigging towers
 Drawing Title: NRT40-10 RE
 Rev: A A1